

## Woven Polypropylene Fabric. Think “Outside The Bag.”

Hard to imagine the contemporary world of global bulk shipping without FIBCs. They’re everywhere. Whether it’s readying an abundant harvest for processing or even carefully containing a delicate product for transport, the rugged FIBC meets the challenge – from one corner of the planet to the other. And by carting loads between 2,000 and 4,000 lbs. across land and sea, the FIBC is no ordinary “bag.”

Berry Plastics manufactures some of the industry’s most recognized FIBC brands: Marino Technologies, Rafypak, Walpole Bag, and Atlas Bag. But we don’t just make the bags. We also make the exceptionally strong woven polypropylene fabric from which the bag is constructed. When you think of FIBCs, think Berry Plastics. But also think “outside the bag.”

When it comes to your needs for woven polypropylene fabric and webbing, we’ve got you covered, too.

## Woven Polypropylene Fabric.

North American-Made and Certified: ISO, FDA, and GMP.

**Fabric Types.** 1.6 oz. to 10.0 oz. (Flat) and 5.0 to 6.5 (Circular).

**Coated or Uncoated.** Customized for use.

**UV Protection.** Available for all fabrics, especially if used temporarily in outdoor environments.

**Fabric Testing.** In-house testing for dynamic parameters, such as tensile strength, elongation, and UV to ensure consistent fabric quality.

**Fabric Colors.** Customized color concentrate for large runs.

### WEBBING

Weight, tensile strength, elongation, and color customized for use.




# Fabric Specifications

DESCRIPTION		WARP			WEFT		WEIGHT (gr/m <sup>2</sup> )			Coating Thickness	Minimum Production Lot per Width	Width	
TYPE	ITEM	ELONGATION %	TENSILE STRENGTH (KG OF FORCE PER INCH)	TENSILE STRENGTH IN REINFORCED BANDS (KGF/IN)	ELONGATION %	TENSILE STRENGTH (KG OF FORCE PER INCH)	Woven	Coating	Total				
Flat	Flat 1.6 oz	1F2XXXX1	14.0	35.0	N/A	14.0	35.0	60.5	18.0	78.5	0.75 - 0.9 mil	20,000	According to Customer Requirements. (Coated fabric maximum width 100".)
	Flat 3.0 oz (Coated)	1F3XXXX1	14.0	43.0	N/A	14.0	43.0	81.5	22.0	103.5	1.0 - 1.2 mil	20,000	
	Flat 5.0 oz	1F5XXXX1	21.0	110.0	N/A	21.0	98.0	169.0	26.0	195.0	1.2 - 1.4 mil	10,000	
	Flat 6.0 oz	1F6XXXX1	20.0	125.0	N/A	20.0	110.0	203.0	26.0	229.0	1.2 - 1.4 mil	10,000	
	Flat 6.5 oz	1F6XXXX1	20.0	125.0	N/A	20.0	125.0	219.5	26.0	245.5	1.2 - 1.4 mil	10,000	
	Flat 7.2 oz	1F7XXXX1	22.0	165.0	N/A	20.0	135.0	250.0	28.0	278.0	1.2 - 1.4 mil	10,000	
	Flat 8.0 oz	1F8XXXX1	22.0	180.0	N/A	20.0	160.0	271.0	28.0	299.0	1.2 - 1.4 mil	10,000	
Circular	Flat 10.0 oz	1F10XXXX1	22.0	225.0	N/A	20.0	195.0	335.0	28.0	363.0	1.2 - 1.4 mil	10,000	
	Circular 5.0 oz	1T5XXXX1	22.0	110.0	165.0	20.0	98.0	191.0	28.0	219.0	1.2 - 1.4 mil	5,000	68" to 85"
	Circular 6.5 oz	1T6XXXX1	22.0	125.0	210.0	20.0	125.0	238.0	28.0	266.0	1.2 - 1.4 mil	5,000	68" to 85"

% Retention of Mechanical Properties: 70% after 1,200 Hours in Xenon Arc.  
 Coating: 80% PP and 20% PE.

ITEM NUMBERING SYSTEM: First X: C= Coated or U = Uncoated  
 Second and Third XX: Width in Inches  
 Fourth X: Color (W = White or B = Black)

## Flexible Intermediate Bulk Containers • Woven Polypropylene Fabric • Webbing

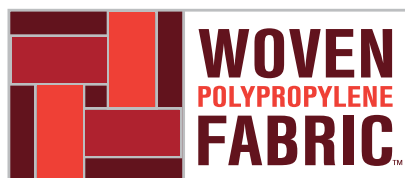

Berry Plastics – Tapes and Coatings Division  
 FIBC  
 5941 NW 173 Drive, Suite 5  
 Miami, FL 33015 USA  
 Tel: 800.291.0192 Fax: 305.702.5009  
 Visit our Website at: [www.berryplastics.com](http://www.berryplastics.com)

Certifications:  
 ISO, FDA, GMP

